
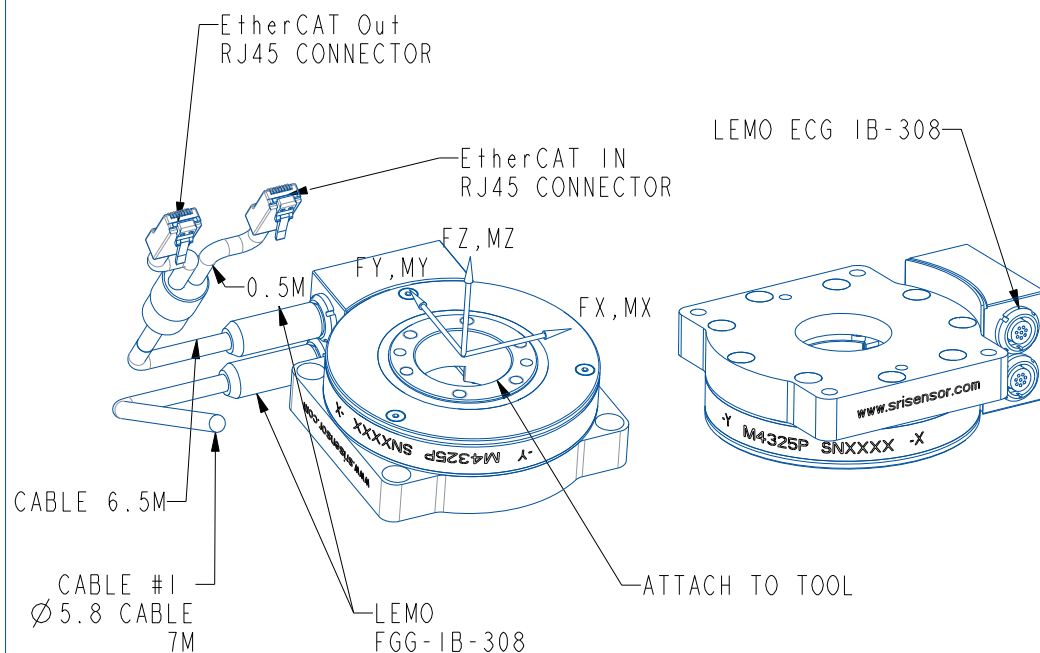


CABLE #1	
BLUE	+24V
BLUE&WHITE	GND
BROWN	RS232-TX
BROWN&WHITE	RS232-RX
ORANGE	REFSEN+
ORANGE&WHITE	REFSEN-

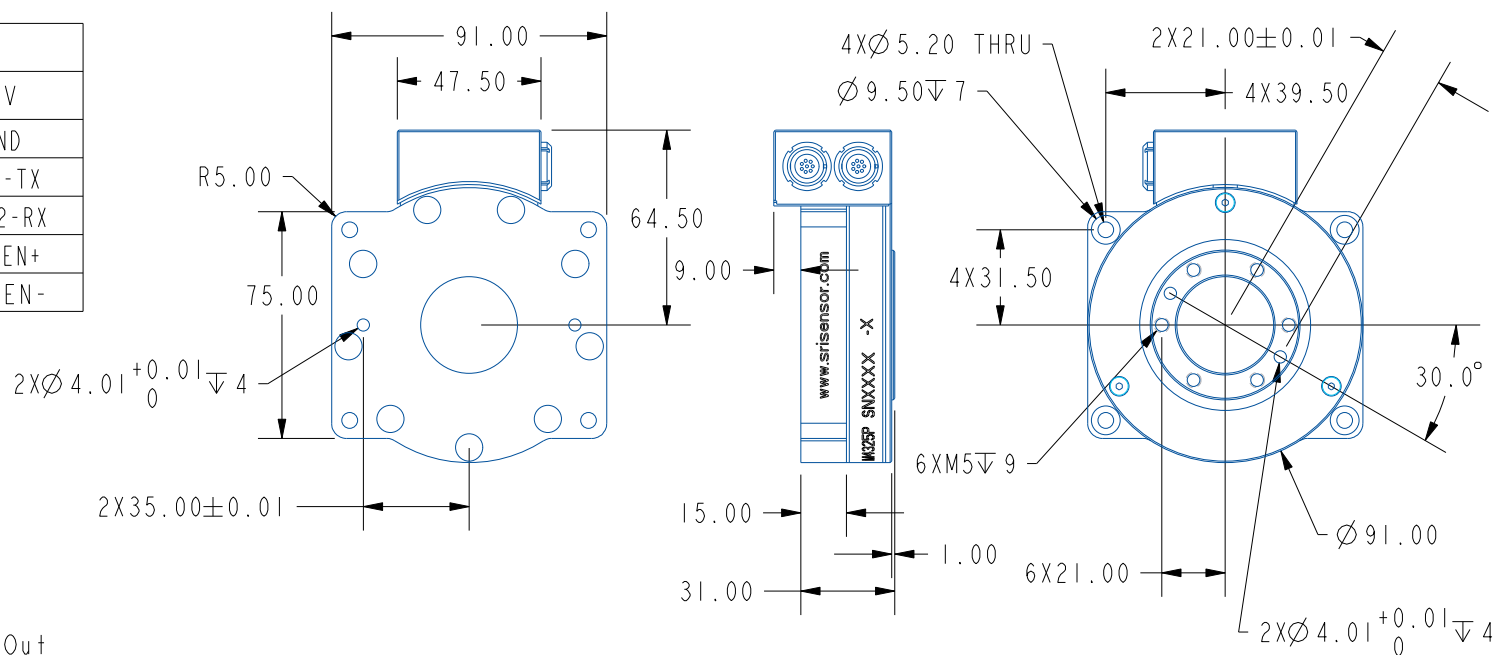

SPECIFICATIONS

POWER SUPPLY	+24V@120MA
OVERLOAD CAPACITY (%F.S.)	400
FREE AIR RESONANT FREQ. (HZ.)	1500
CROSSTALK (%F.S.)	2.5
NON-LINEARITY (%F.S.)	0.5
HYSTERESIS (%F.S.)	0.5
OPERATING TEMP. RANGE (°C)	-40 TO +100
COMPENSATED TEMP. RANGE (°C)	10 TO 70
MASS (KG)	0.66

SUNRISE INSTRUMENTS
www.srisensor.com

SIX AXIS CIRCULAR LOAD CELL, COUPLED
D91MM F200N, EtherCAT, IP60

	Fx	Fy	Fz	Mx	My	Mz
CAPACITY (N/Nm)	200	200	400	20	20	20
OUTPUT	EtherCAT					

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN MM

M4325P

REV.
A2