
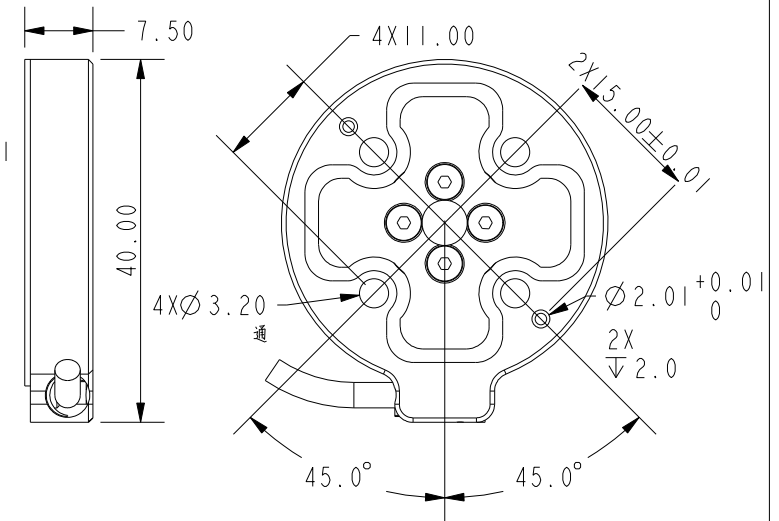


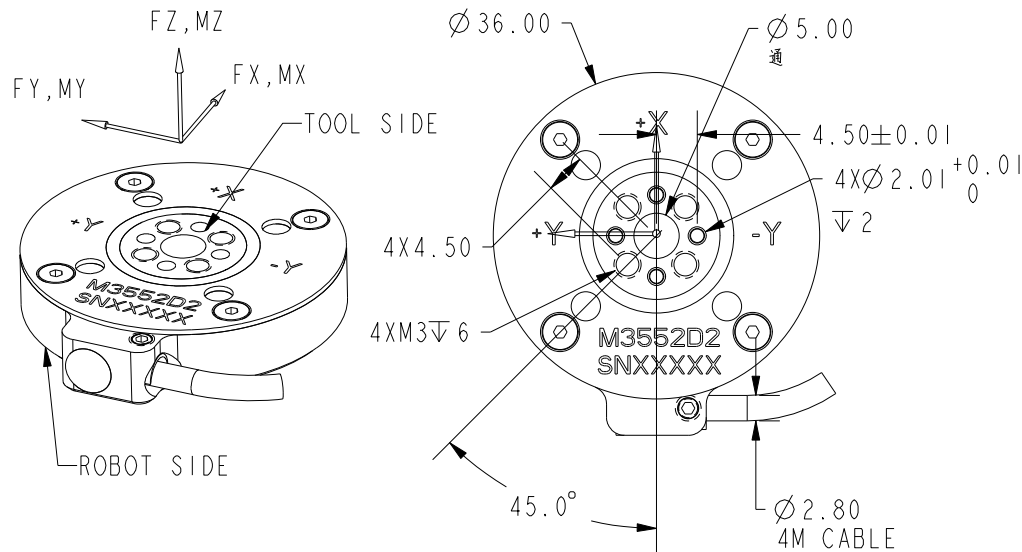

POSITIVE OUTPUT WHEN THE LOADING IS APPLIED TO THE TOOL SIDE OF THE LAODCELL, PER COORDINATE SYSTEM AS SHOWN

CHANNELS ARE COUPLED, AND DECOUPLED MATRIX ARE PROVIDED

TO ENSURE STABLE OUTPUT, MATING PLATES WITH MINIMUM 3MM THICK (STEEL OR ALUMINUM) ON BOTH SIDES ARE REQUIRED

	Fx	Fy	Fz	Mx	My	Mz
CAPACITY (N/Nm)	600.0	600.0	1000.0	9.0	9.0	9.0
OUTPUT (mV/V)	COUPLED OUTPUT					
BRIDGE RES. (Ω)	700	1400	700	1400	700	1400

WIRING CODE (14-CONDUCTOR CABLE)								
NO.	COLOR	FUNCTION	NO.	COLOR	FUNCTION	NO.	COLOR	FUNCTION
1	GREEN	CH1+	6	BROWN-ST	CH3-	11	PURPLE	CH6+
2	GREEN-ST	CH1-	7	WHITE	CH4+	12	GREY	CH6-
3	YELLOW	CH2+	8	WHITE-ST	CH4-	13	RED	+E
4	YELLOW-ST	CH2-	9	ORANGE	CH5+	14	BLACK	-E
5	BROWN	CH3+	10	BLUE	CH5-			

XXXX-ST (e.g. GREEN-ST) - WITH SHRINK TUBE SHIELD TO SENSOR BODY

SPECIFICATIONS

EXCITATION MAX. (V)	7
OVERLOAD CAPACITY (%F.S.)	200
FREE AIR RESONANT FREQ. (HZ.)	2900
CROSSTALK (%F.S.)	4.0
NON-LINEARITY (%F.S.)	1.5
HYSTERESIS (%F.S.)	1.5
OPERATING TEMP. RANGE ($^{\circ}$ C)	-40 TO +90
COMPENSATED TEMP. RANGE ($^{\circ}$ C)	10 TO 70
MASS (KG)	0.033

SUNRISE INSTRUMENTS

www.srisensor.com

SIX AXIS CIRCULAR LOAD CELL
EXTRA THIN, COUPLED, D36MM F600N

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN MM

M3552D2

REV.
A