


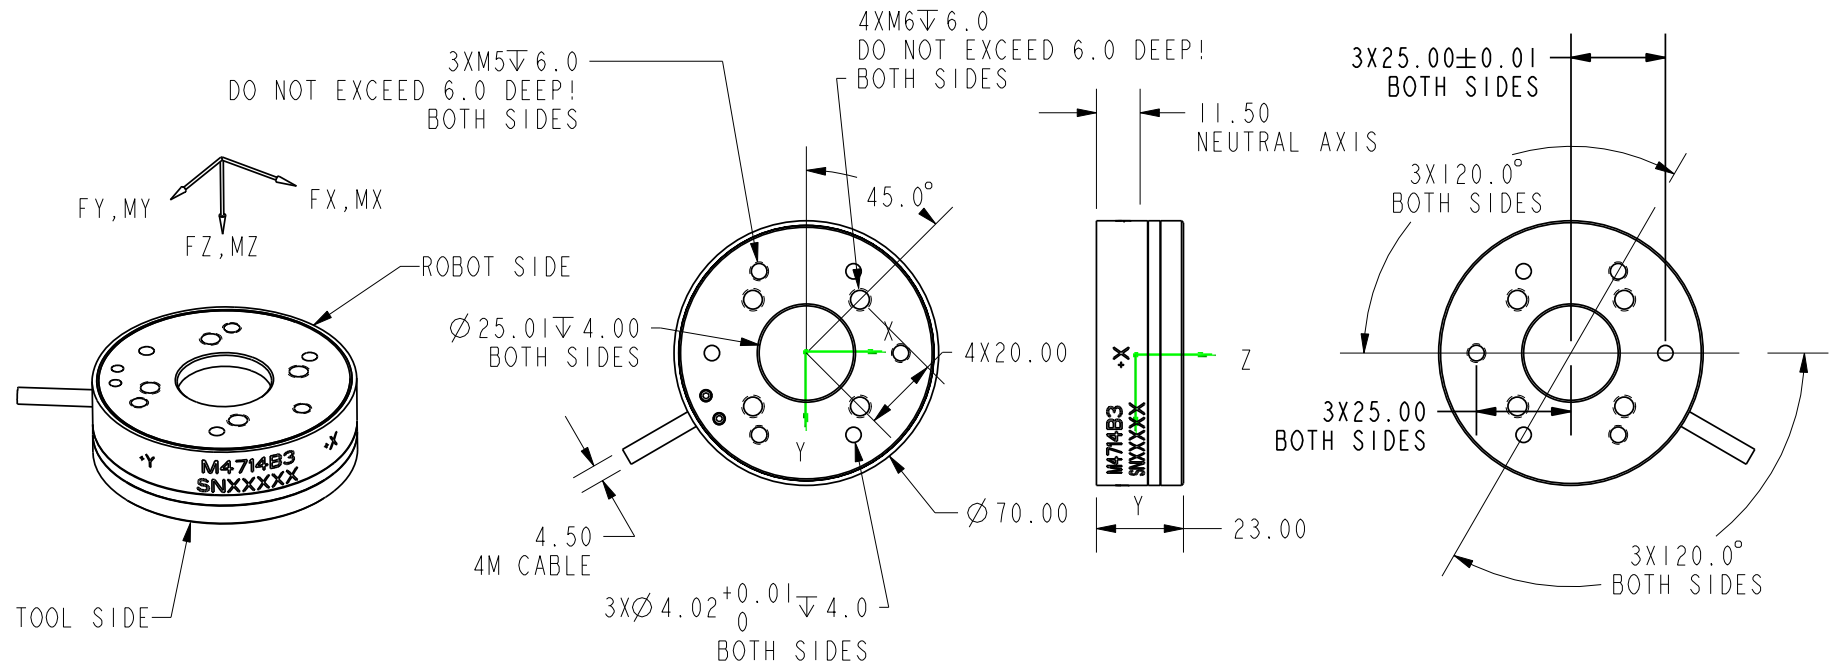

POSITIVE OUTPUT WHEN THE LOAD IS APPLIED TO THE TOOL SIDE
PER COORDINATE SYSTEM AS SHOWN

THE OUTPUTS ARE NOT STRUCTURALLY DECOUPLED
A 6X6 DECOUPLED MATRIX IS PROVIDED TO OBTAIN EACH COMPONENT

SPECIFICATIONS

EXCITATION MAX. (V)	7.5 ± 0.5
OVERLOAD CAPACITY (%F.S.)	500
FREE AIR RESONANT FREQ. (HZ.)	4500
CROSSTALK (%F.S.)	2.5
NON-LINEARITY (%F.S.)	0.5
HYSTERESIS (%F.S.)	0.5
OPERATING TEMP. RANGE (°C)	-40 TO +100
COMPENSATED TEMP. RANGE (°C)	10 TO 70
MASS (KG)	0.32

	Fx	Fy	Fz	Mx	My	Mz
CAPACITY (N/Nm)	900	900	1800	100	100	100
OUTPUT (mV/V)	COUPLED					
BRIDGE RES. (Ω)	700	700	700	700	700	700

WIRING CODE - TWISTED PAIR

FUNC	CHN1	CHN2	CHN3	CHN4	CHN5	CHN6	CHN7	CHN8	CHN9
+SIG	WT(BN)	OG(BN)	BL(BN)	YL(BN)	RD(BN)	WT(BK)	OG(BK)	BL(BK)	YL(BK)
-SIG	BN(WT)	BN(OG)	BN(BL)	BN(YL)	BN(RD)	BK(WT)	BK(OG)	BK(BL)	BK(YL)
+EXC	RD(BK)								
-EXC	BK(RD)								

WT=WHITE, BN=BROWN, OG=ORANGE, BL=BLUE, YL=YELLOW, RD=RED,
BK=BLACK, "WT(BN)" = WHITE CABLE IN WHITE/BROWN PAIR

SUNRISE INSTRUMENTS

www.srisensor.com

SIX AXIS CIRCULAR LOAD CELL, COUPLED
D70MM F900N, W/DAS & CAN BUS

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN MM

M4714B3

REV.
A